Typical Floor Plan

Typical Shower Width 1000

Typical Cubicle Width 800 - 900

Ambulant Cubicle Width 900 - 920

In between Constraints

WC

Wall

Shower Outlet

Divisional Panel

Shower Splash Nib

Shower Seat/ Shelf

Door

Nibs

Typical Shower Depth 1700 - 1800

1000

760

260

250

Standard Pan Depth 610-660

900 Minimum

Ambulant Cubicle Layout to Comply with1428-1

605 Opening 600 Door

605

700 Opening

Typical Elevation

Door L or R 3 Concealed Fix Gravity Hinges Per Door

Standard Coat Hook/Bumper 1800 AFFL +/- 50mm
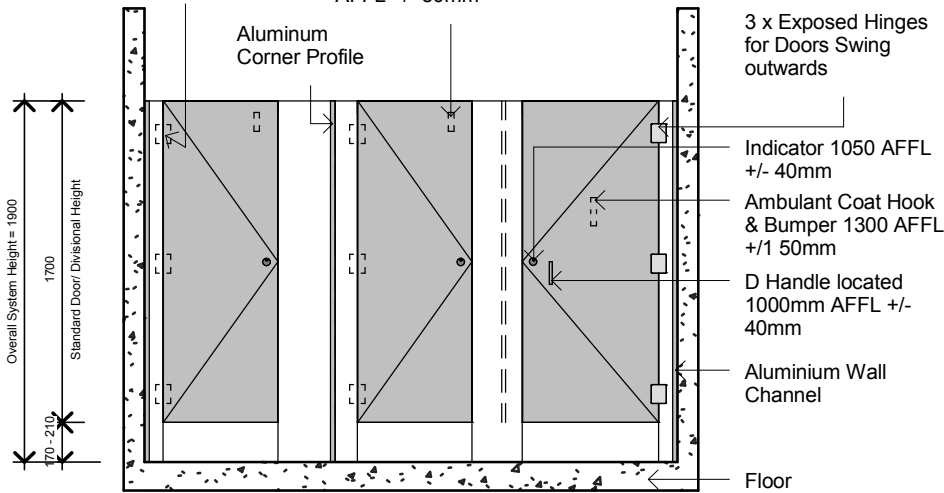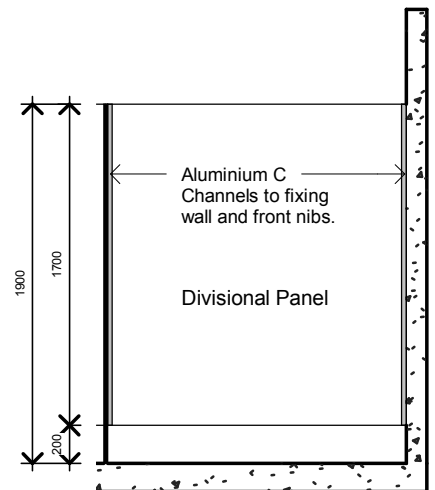
Aluminum Corner Profile

3 x Exposed Hinges for Doors Swing outwards

Indicator 1050 AFFL +/- 40mm

Ambulant Coat Hook & Bumper 1300 AFFL +/1 50mm

D Handle located 1000mm AFFL +/- 40mm

Aluminium Wall Channel

Floor

Overall System Height = 1900

Standard Door/ Divisional Height 1700

170 - 210

Typical Section

Aluminium C Channels to fixing wall and front nibs.

Divisional Panel

1900

1700

200

Drawn by	Duracube
Date	-
Job #	-
Scale	1 : 40

Signature		A101
Date		

It is the clients responsibility to ensure the layout complies with relevant legislation including AS1428.1